

MOTOROLA MR2600

SOFTWARE VERSION 1.0.18

What's new in this release


- Security improvements

Upgrading the MR2600 software

Note: It is very important that there are no interruptions to the upgrade process of the software as it could cause irreparable damage to the unit. We recommend that you use an Ethernet cable connection from your computer to the router.


If you are using a laptop, make sure that it has sufficient power to complete the process. Please be sure to back up all settings as we do recommend that the unit gets reset back to factory settings during this software upgrade.

1. Download the software file to your computer and make note of the location where you saved it to.
2. Disconnect the router from the modem.
3. Connect your computer to the router with an Ethernet cable.
4. Open a web browser, type **192.168.1.1** in the address bar, and then press Enter.
5. Enter the password **motorola** and then click **Login**.

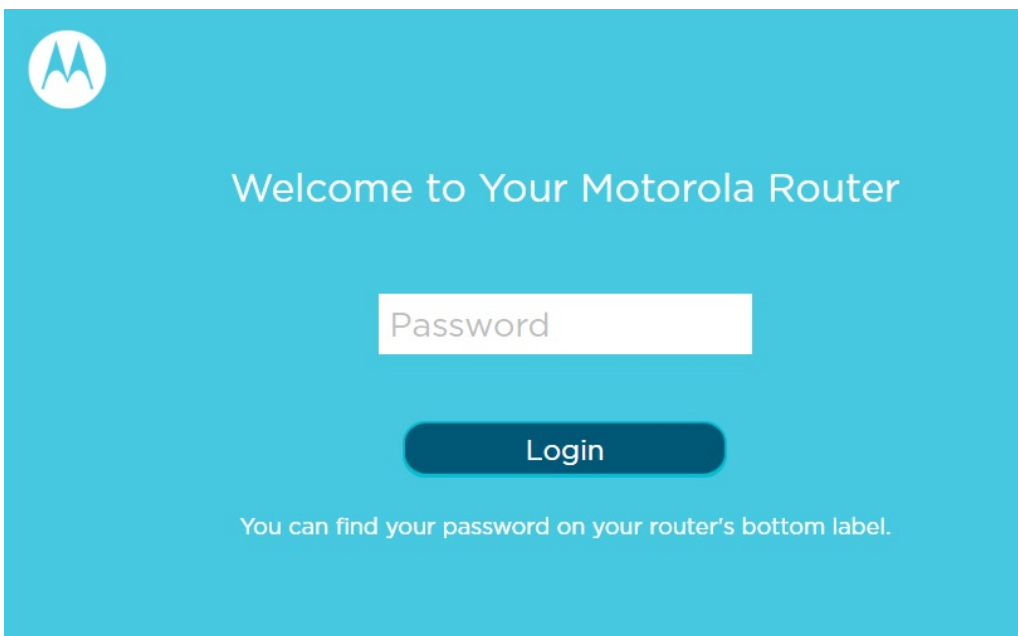

6. Click **Admin** → **Upgrade**.
7. You will see the **Software Upgrade** page. Click **Select File**.

Note: Your router's current software version may be different than what is shown in the screenshot below.

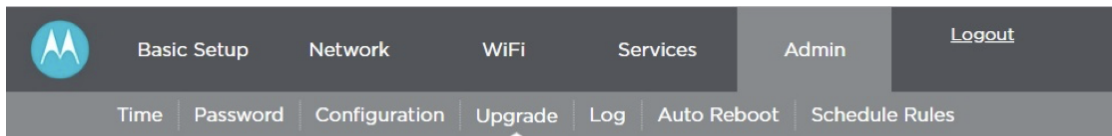


Software upgrade

Current Software Version: 1.0.15 i
Upgrade Software: Select File

8. Find the software file (MR2600-1.0.18) you downloaded. Click on the software file, then click **Open**.
9. Click **Load** to begin the software upgrade.
10. Click **OK** to **"Do you want to upgrade Software?"**
11. You will now see the upgrade status. *Do not power off the device until the Software Upgrade is complete.*



12. Once the upgrade is at 100%, you will see **"Software Upgrade success."** Click **OK**.
 13. You will now see the **"Welcome to your Motorola Router"** login screen. To confirm that you installed the latest software, go ahead and log in using the password **motorola** and then clicking Login.
 14. Once you log in to the router, it should be on the **Basic Setup** → **Status** page.
- Verify the Software Version (or Firmware Version) you installed:

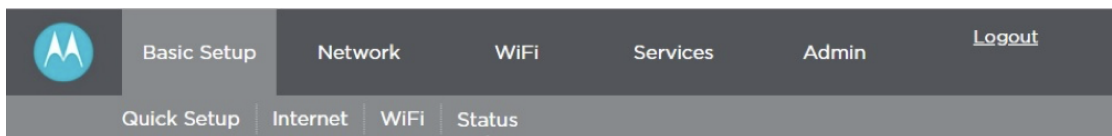

Status

Model Name:	MR2600	
Firmware Version:	1.0.18	
Network Status	IPv4 / IPv6	
Connection Type:	Dynamic IP (DHCP)	i
WAN Cable Status:	Disconnected	i
Network Status:	Disconnected	i
Connection Uptime:	0 Day 0 Hour 0 Min 0 Sec	i
MAC Address:	E4:90:7E:F4:CB:45	i

You are done upgrading the software to your router.